



# ARCHITECTURAL “V” RIB PANEL SPECIFICATIONS

---

## 1. PRODUCT NAME

American Architectural “V” Rib Panels for wall applications.

## 2. MANUFACTURER

**AMERICAN BUILDINGS COMPANY**

## 3. PRODUCT DESCRIPTION

These wall panels provide 36” of coverage and reveal a sculptured appearance with semi-concealed fasteners. Rib depth is 1 1/4” on 12” centers.

**Basic Use:** A wall panel system for new or retrofit construction.

**Materials:** Architectural “V” Rib wall panels are available in , 26 or 24 gage 80,000 psi, G90 zinc-coated (galvanized) steel or aluminum-zinc alloy-coated (AZ50 or AZ55) steel. Pre-painted panels have PVDF or SP (Silicone-Polyester) finish. Architectural “V” Rib panels are attached to the secondary framing members by self-drilling carbon steel screws, No. 12 x 1-1/4” hex washer head, cadmium or zinc plated. Architectural “V” Rib panel sidelaps are stitched with self-drilling carbon steel screws, No. 14 X 3/4” cadmium or zinc plated. Fasteners are normally color coordinated with a premium coating system that protects against corrosion and weathering.

Maximum insulation thickness allowed with these panels is 6”.

## 4. TECHNICAL DATA

The Architectural “V” Rib panel has been tested in accordance with Air Infiltration, ASTM E283 and Water Penetration, ASTM E331. This panel has received a Class A fire rating when tested in accordance with test procedure ASTM E108.

## 5. INSTALLATION

Installation should be performed in accordance with American Buildings Company’s manuals and building erection drawings, and should be by a qualified installer using proper tools and equipment. Systems are installed by American Buildings Company Authorized Builders.

## 6. AVAILABILITY

For availability, contact:

**AMERICAN BUILDINGS COMPANY**

## 7. WARRANTY

Thirty-five Year material warranties are available.

## 8. MAINTENANCE

Only normal routine maintenance is required over the life of the panels.

## 9. TECHNICAL SERVICES

For information, contact:


**AMERICAN BUILDINGS COMPANY**

## 10. PRODUCT NOTES


American Buildings Company reserves the right to revise all standard specifications and information. American Buildings Company regularly updates its published “Standard Specifications” on the American Buildings web site, [www.americanbuildings.com](http://www.americanbuildings.com), which supercede and replace any previously published standard specifications of American Buildings Company.

...continued

# ARCHITECTURAL "V" RIB PANEL SPECIFICATIONS

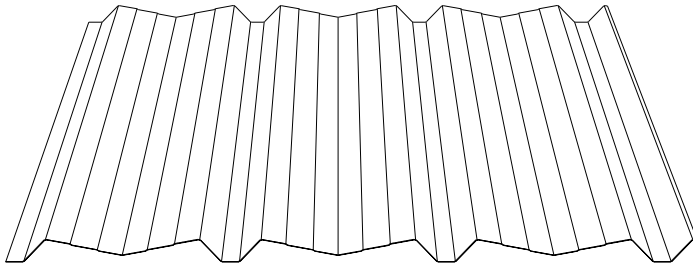

PANEL PROFILE

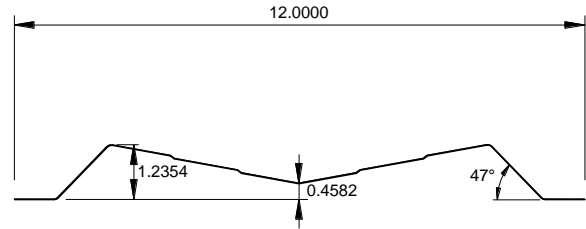

PARTIAL CROSS SECTION

Engineering Properties of American Buildings Company Architectural "V" Rib AVN Panel (ASD)											
Designated Gage of Steel	Steel Yield KSI	Base Metal Thick. (In.)	Total Thick. (In.)	Panel Base Metal Weight (lbs. / ft. <sup>2</sup> )	Top In Compression			Bottom In Compression			Fb KSI
					Ix (In. <sup>4</sup> / ft.)	Sx (In. <sup>3</sup> / ft.)	Ma K-IN. / ft.	Ix (In. <sup>4</sup> / ft.)	Sx (In. <sup>3</sup> / ft.)	Ma K-IN. / ft.	
26 Ga.	80	0.0177	0.0193	0.86	0.030	0.042	1.50	0.028	0.035	1.26	36
24 Ga.	80	0.0222	0.0238	1.09	0.040	0.054	1.93	0.037	0.047	1.70	36

Gage of Panel	No. of Spans	Load Type	Maximum Total Uniform Load in PSF															
			Span Lengths, Ft.															
			3.00		3.50		4.00		4.50		5.00		6.00		7.00		7.50	
26 Ga.	1	POS	111	B	82	B	63	B	49	B	40	B	28	B	20	B	18	B
		NEG	-94	B	-69	B	-53	B	-42	B	-34	B	-23	B	-17	B	-15	B
	2	POS	71	C	61	C	51	B+S	41	B+S	33	B+S	23	B+S	17	B+S	15	B+S
		NEG	-64	P	-55	P	-48	P	-42	P	-38	P	-27	B+S	-20	B+S	-18	B+S
	3	POS	81	C	70	C	61	C	51	B+S	41	B+S	29	B+S	21	B+S	19	B+S
		NEG	-72	P	-62	P	-54	P	-48	P	-43	P	-34	B+S	-25	B+S	-22	B+S
	4	POS	78	C	67	C	59	C	47	B+S	39	B+S	27	B+S	20	B+S	17	B+S
		NEG	-70	P	-60	P	-52	P	-46	P	-42	P	-32	B+S	-24	B+S	-21	B+S
24 Ga.	1	POS	143	B	105	B	81	B	64	B	52	B	36	B	26	B	23	B
		NEG	-126	B	-93	B	-71	B	-56	B	-45	B	-32	B	-23	B	-20	B
	2	POS	109	C	91	B+S	70	B+S	55	B+S	45	B+S	31	B+S	23	B+S	20	B+S
		NEG	-80	P	-69	P	-60	P	-53	P	-48	P	-36	B+S	-26	B+S	-23	B+S
	3	POS	124	C	106	C	87	B+S	69	B+S	56	B+S	39	B+S	29	B+S	25	B+S
		NEG	-91	P	-78	P	-68	P	-61	P	-55	P	-44	B+S	-33	B+S	-28	B+S
	4	POS	119	C	102	C	81	B+S	65	B+S	52	B+S	37	B+S	27	B+S	23	B+S
		NEG	-87	P	-75	P	-66	P	-58	P	-52	P	-41	B+S	-30	B+S	-27	B+S

- The panels are checked for bending (B), shear (S), combined bending and shear (B+S), deflection (D), web crippling (C), and panel pullover (P). The controlling check is noted in the table. Deflection is limited to  $span/60$ , and includes the permitted wind load reduction factor of 0.7 times the "component and cladding" loads as noted in footnote f of IBC Table 1604.3.
- Section Properties are calculated in accordance with the 2012 *North American Specification for the Design of Cold-Formed Steel Structural Members*.
- Minimum yield strength of 29, 26 and 24 gage steel is 80,000 psi. Minimum yield strength of 22 gage steel is 50,000 psi.
- Steel panels are either aluminum-zinc alloy or G-90 coated. The base metal thickness is used in determining section properties.
- Positive load (POS) is applied inward toward the panel supports, and is applied to the outer surface of the full panel cross-section. Negative load (NEG) is in the opposite direction.