

# MAXSPEED<sup>®</sup>

HIGH SPEED SPRINGLESS  
IMPACTABLE RUBBER DOOR



**PERFORMAX** <sup>®</sup>  
HIGH-PERFORMANCE DOORS

[WWW.PERFORMAXGLOBAL.COM](http://WWW.PERFORMAXGLOBAL.COM)

CORPORATE: 484.840.8500

5 CROZERVILLE ROAD ASTON PA, 19014

## APPLICATIONS

- Transportation
- Bus Terminals
- Airports
- Automotive Facilities
- Recycling
- Manufacturing Facilities
- Mining
- Energy

## FEATURES & BENEFITS

- SAFE, springless operation reduces injury associated with torsion springs
- Impactable design reduces maintenance, repair costs, and decreases downtime
- Fast operating speeds reduces air infiltration which leads to reduced energy costs
- With opening speed with up to 48" per second, productivity and traffic flow increases
- Optional patent pending soft bottom edge reduces damage to heavy equipment upon impact
- Limited Lifetime Warranty on our reinforced 1/4" thick rubber curtain

**MAXSPEED**<sup>®</sup>

High Speed Springless Impactable Rubber Door

**RAPID HIGH-SPEED DOOR  
IMPROVES TRAFFIC FLOW**

[WWW.PERFORMAXGLOBAL.COM](http://WWW.PERFORMAXGLOBAL.COM)

# MAXSPEED<sup>®</sup>

High Speed Springless Impactable Rubber Door



---

Impactable design and  
breakaway bottom bar  
minimize damage and  
lower maintenance costs

---

Direct variable frequency  
drive & springless operation  
high speed rubber doors



# MAXSPEED<sup>®</sup>

High Speed Springless Impactable Rubber Door



Springless engineering  
reduces safety concerns  
promoting a safer work  
environment

Energy costs lowered due  
to fast operating speeds  
reducing air infiltration



The logo for MAXSPEED, with 'MAX' in red and 'SPEED' in black, followed by a registered trademark symbol.

High Speed Springless Impactable Rubber Door




**STRONG, RUGGED, AND DURABLE DOORS  
FOR OVERSIZED OPENINGS**

[WWW.PERFORMAXGLOBAL.COM](http://WWW.PERFORMAXGLOBAL.COM)

# MAXSPEED®

High Speed Springless Impactable Rubber Door

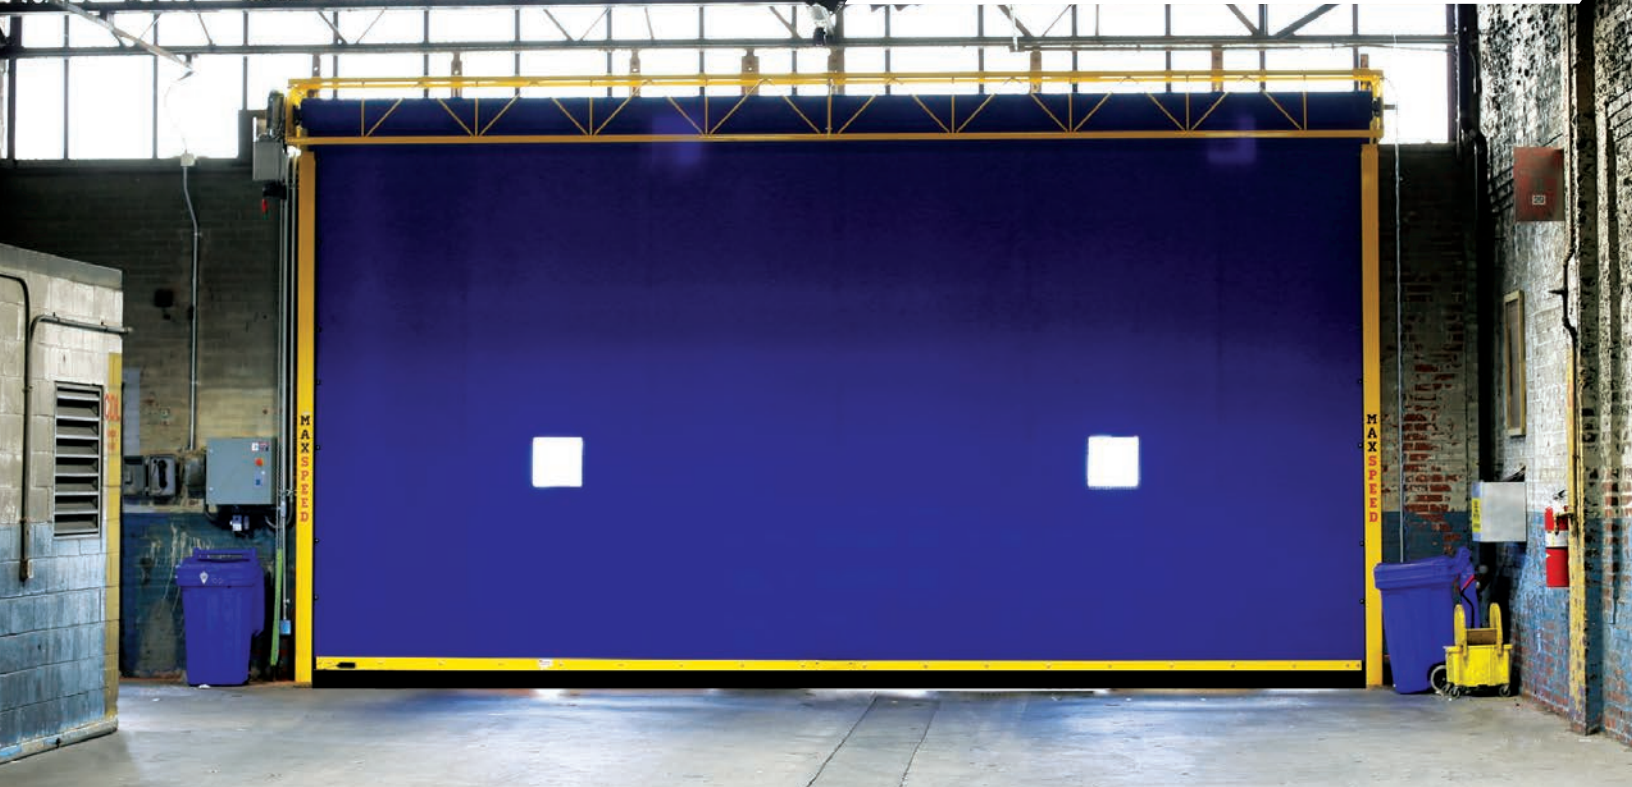


## SPECIFICATIONS

### Standard Features

|                |  |
|----------------|--|
| OPENING SPEED  | Up to 48" per second   |
| MAX SIZE       | 40' x 30'  |
| DRIVE          | Direct Variable Frequency Drive                                      |
| CURTAIN        | ¼" Reinforced Rubber Curtain   |
| GUIDE WIDTH    | 5" Powder Coated Finish on Steel Components                          |
| SAFETY DEVICES | Wireless Safety Reversing Edge, Inertia Brake                        |
| ELECTRICAL     | Reflective Photo Eye<br>460 Volt / 3 Phase, Other Voltages Available |

### Optional Features

|                    |  |
|--------------------|--|
| MECHANICAL         | Hood & Motor Cover, 2" High Visibility Strip               |
| SAFETY DEVICES     | 14" x 14" Vision Windows                                   |
| ACTIVATION DEVICES | Light Curtain  |
| CURTAIN COLORS     | Floor Loops, Pull Cord, Falcon Eye Motion Sensors          |
| APPLICATIONS       | Black Standard; Blue, Gray, and Orange                     |
|                    | Transportation, Manufacturing Facilities, Heavy Industries |



[www.performaxglobal.com](http://www.performaxglobal.com)  
5 CROZERVILLE ROAD, ASTON, PA 19014